




iMac G3 Model M4984 Teardown

Written By: Chris Green

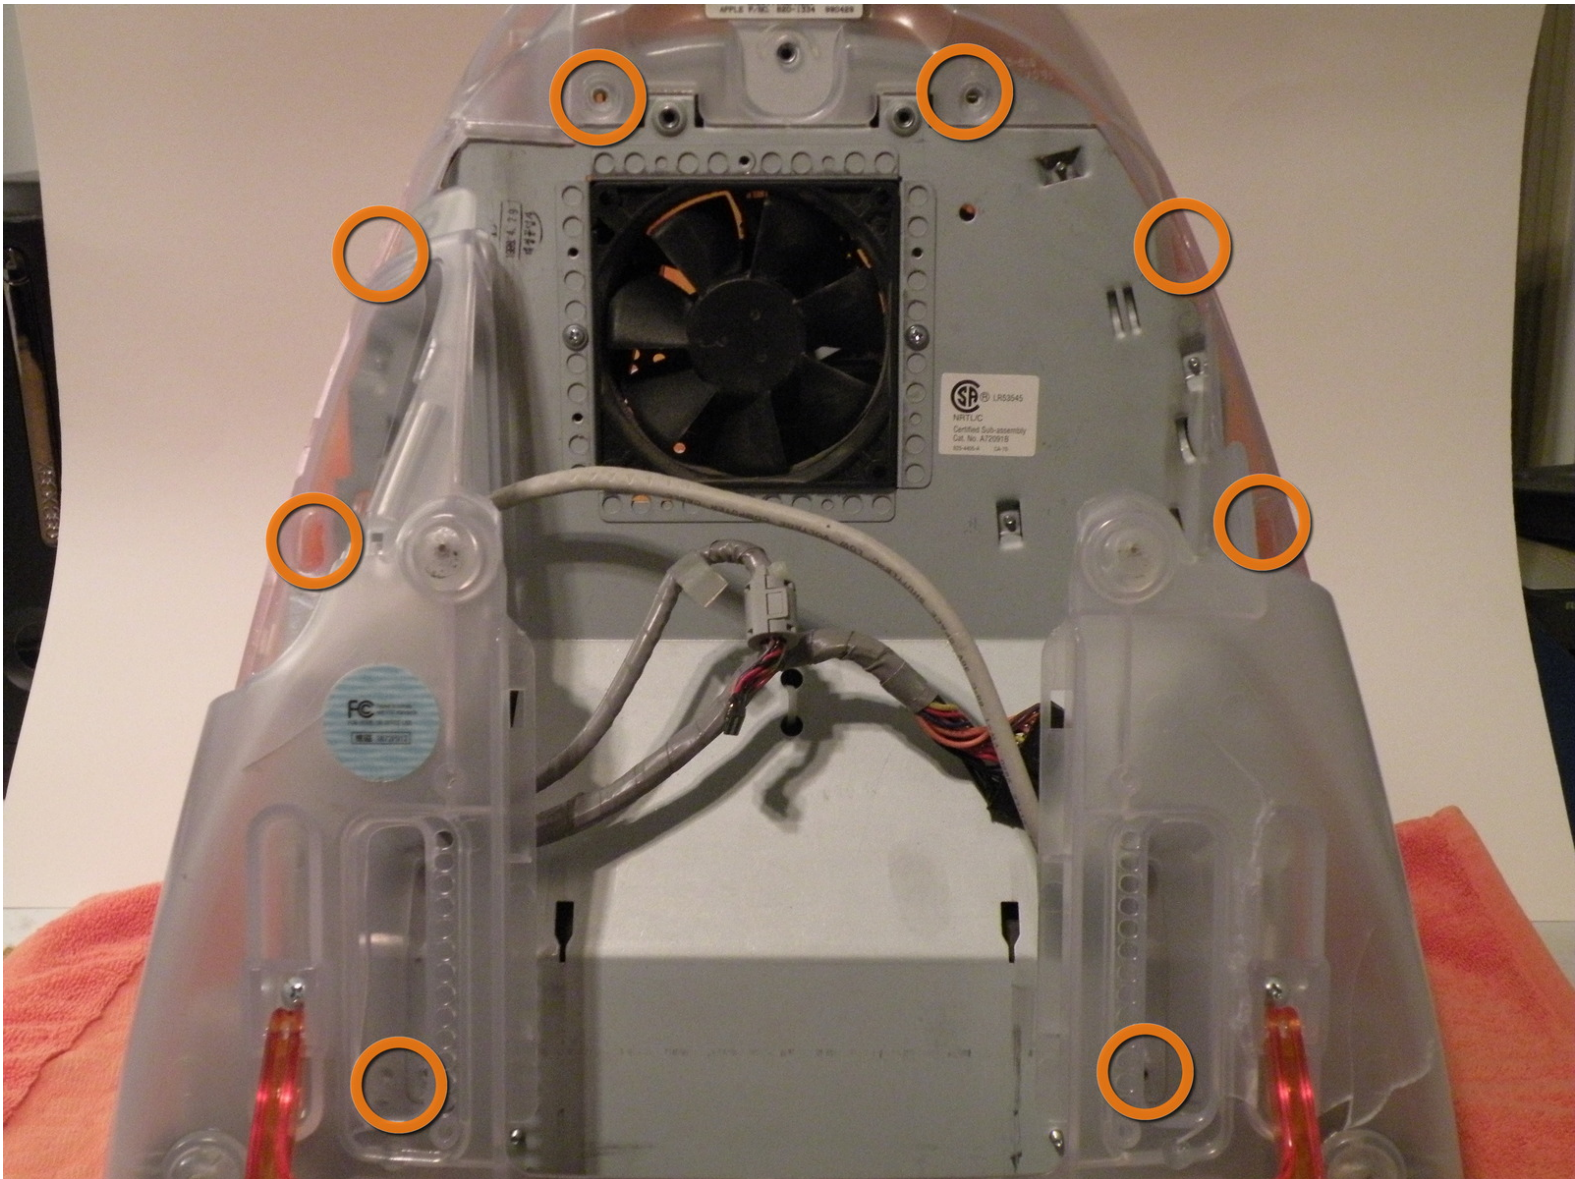

INTRODUCTION

This is the teardown for apple's imac G3.


This isn't done yet, i need to get off of my mac mini, and onto my pc to finish it



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Logic Board

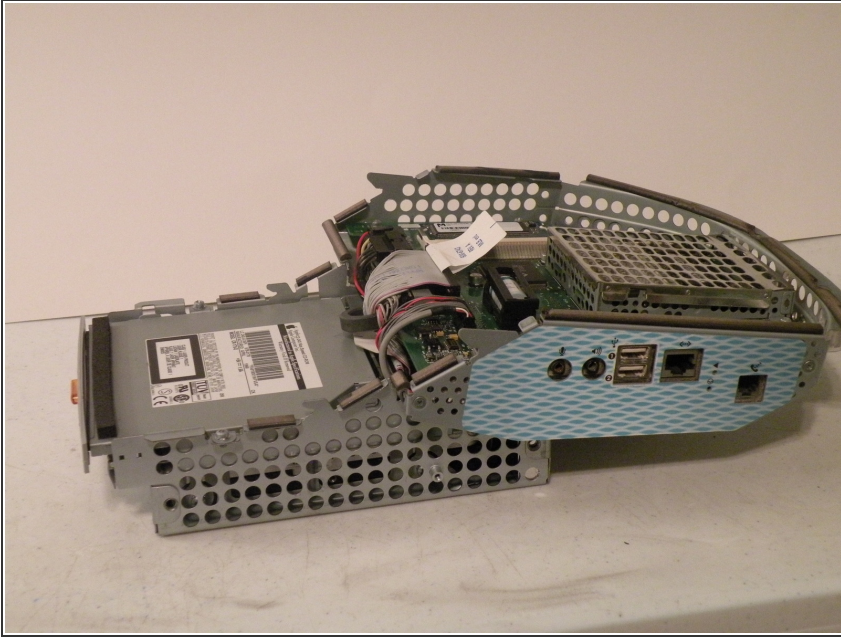


- The iMac G3. This was a great computer for the time, and had plenty of features.

Step 2




- Start by flipping the iMac upside-down. It may help to lay it on a towel, so you don't damage the screen, or scratch the face.

Step 3

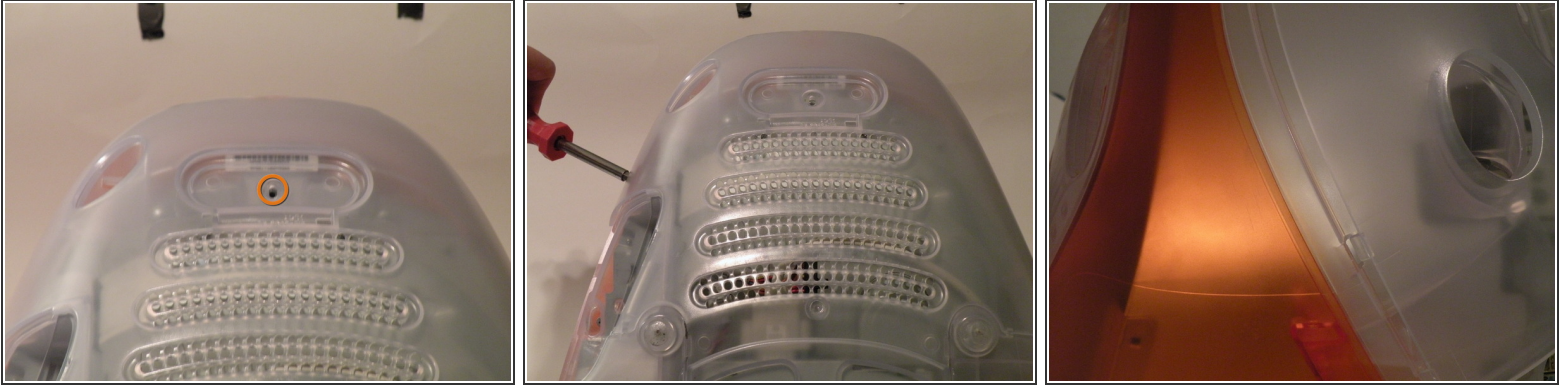


- Remove this Phillips screw.
- Using a flathead screwdriver, work your way around the bottom cover, until it comes off.
- Then, lift the bottom cover up and out, and set it aside.

Step 4

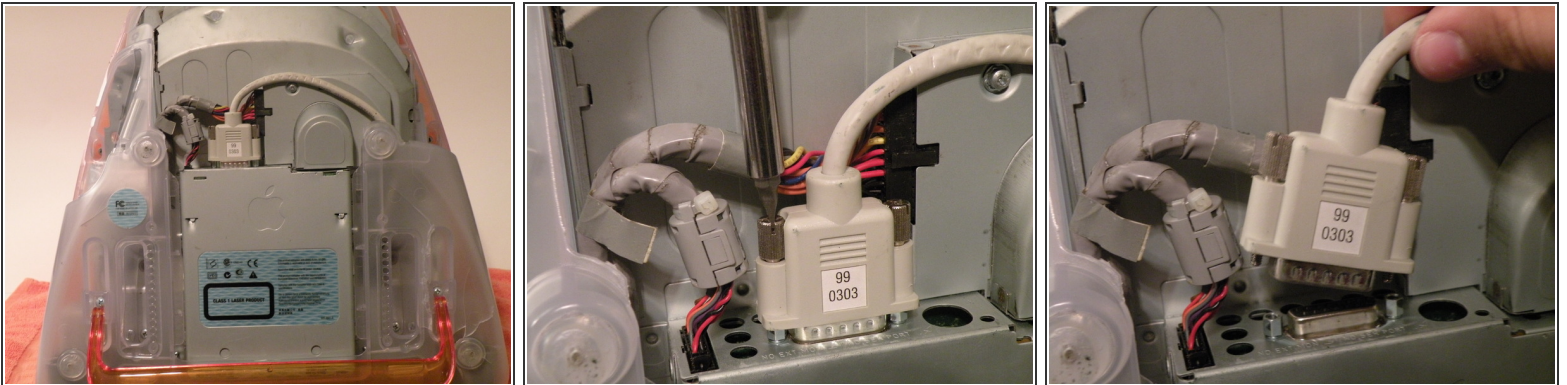

- Now, remove the DB-15 Video connector from the logic board.
- It may be helpful to use a Phillips screwdriver to remove the thumbscrews.

Step 5

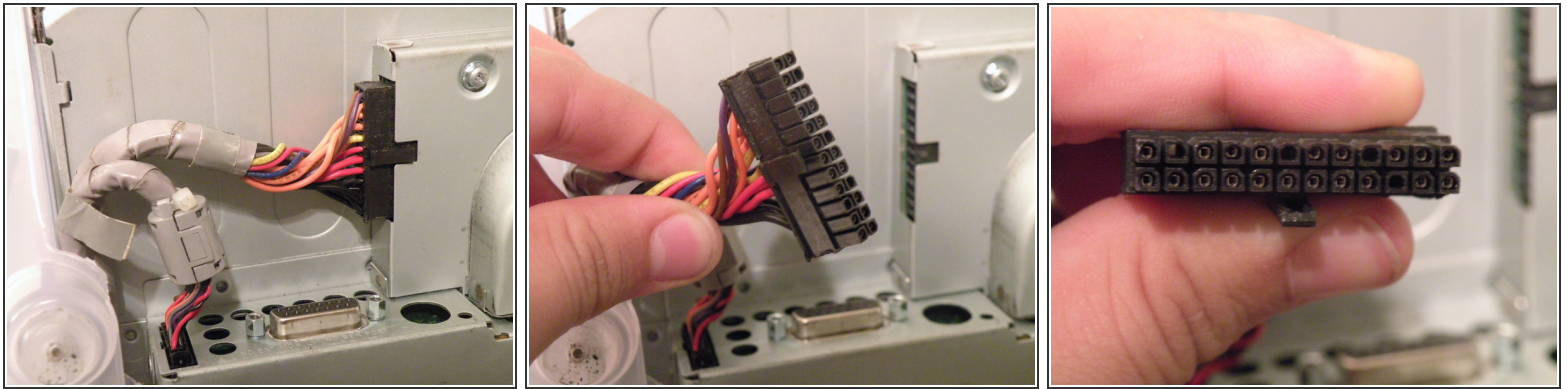



- Remove the power cable from the logic board assembly.

Step 6




- Remove the front panel connector.

Step 7

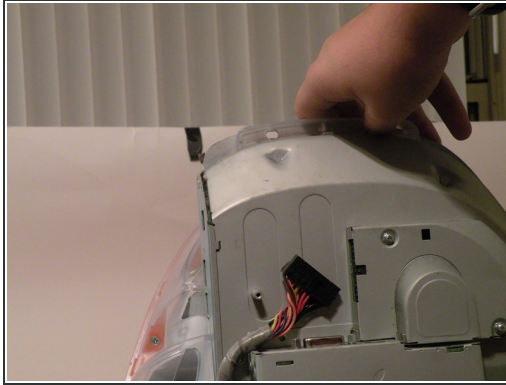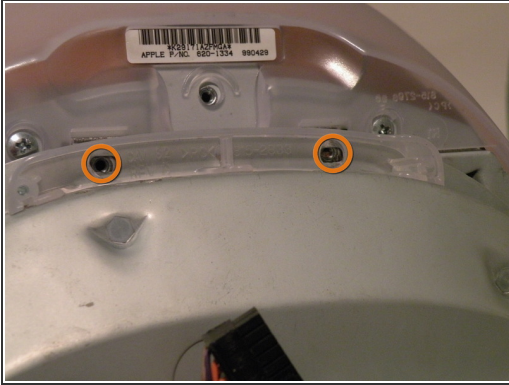


- Now, remove these Phillips screws.
- Now, grab the logic board assembly by the piece of plastic, and lift it out.

Step 8

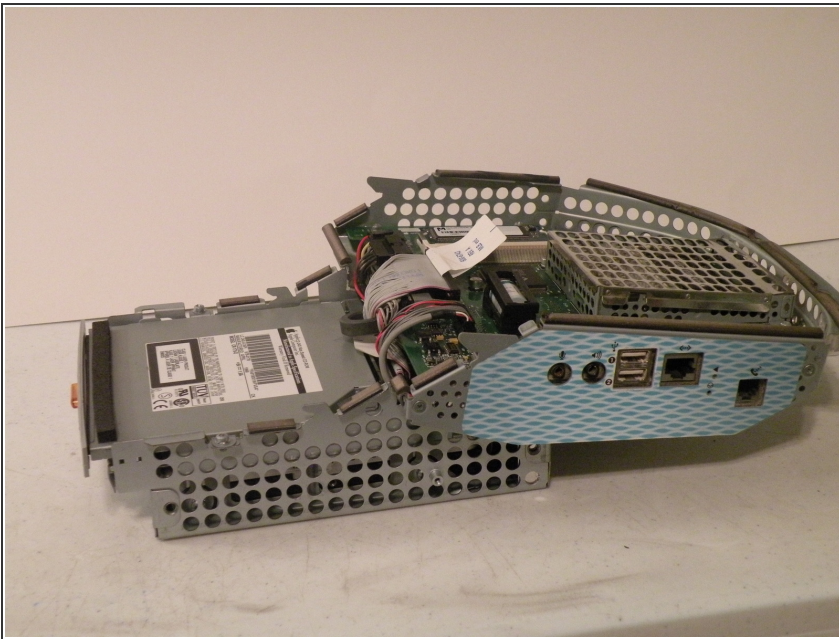



- The logic board assembly. This is the heart of the computer, it contains the motherboard, CPU, RAM, V-RAM, PRAM battery, the hard drive, and the optical drive.

Step 9 — iMac G3 Model M4984 Teardown

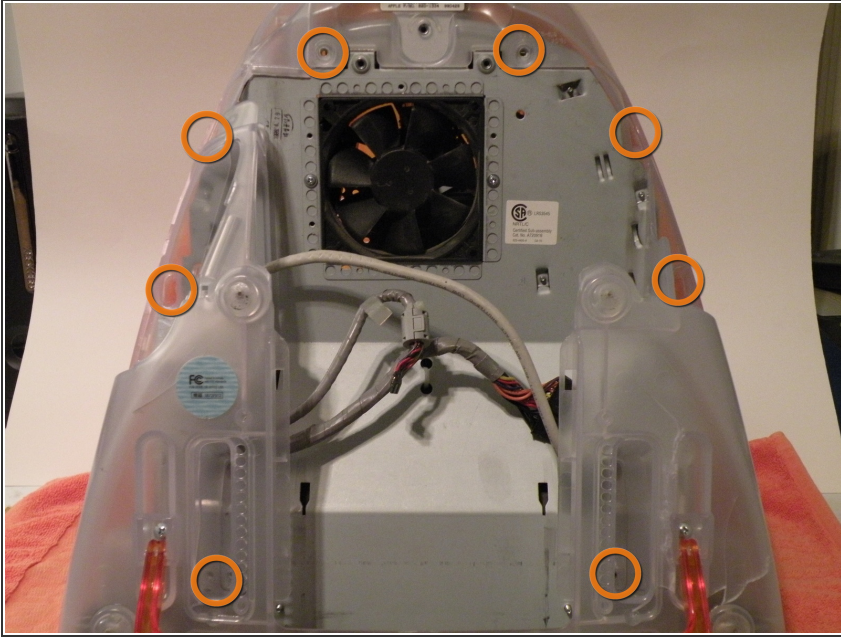

- To remove the bottom cover, remove these phillips screws, and pull the bottom cover off the iMac

Step 10

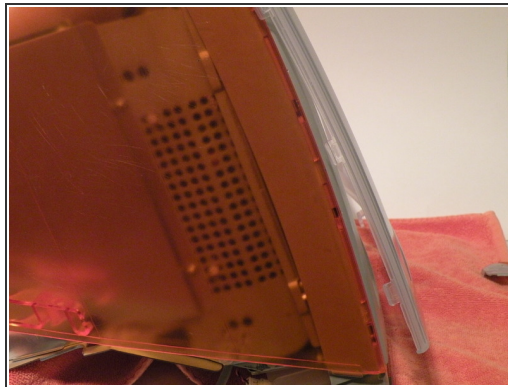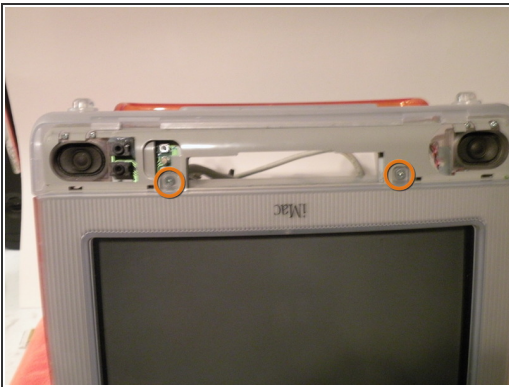

- Removing the faceplate:
- Remove these phillips screws.
- Now, pivot the faceplate up about 60 degrees and pull it away from the imac, with some wiggling, it should come free

To reassemble your device, follow these instructions in reverse order.

